

OWNER'S MANUAL



**7" ROOF MOUNT TFT LCD MONITOR
YOU'RE NOW READY FOR
MORE FUN ON
THE ROAD THAN EVER BEFORE**



PYLE[®]

7" ROOF MOUNT TFT LCD MONITOR

PLVWR71IR

WWW.PYLEAUDIO.COM

YOU'RE NOW READY FOR MORE FUN ON THE ROAD THAN EVER BEFORE

7" TFT LCD Roof-mount Monitor

OSD ADJUSTMENT

- Press the POWER ON/OFF button on the monitor or remote unit to turn on the power.
 - Touch power switch on the monitor to select video for 2 inputs.
 - Press power switch on the monitor 2 second to turn off the monitor
- Press MENU button on the monitor or remote unit to active the OSD function show on the LCD screen and press again to select the adjustment item as below.
 - BRIGHTNESS
 - CONTRAST
 - COLOR
 - U/D NORM/REV (NORMAL/REVERSE)
 - R/L NORM/REV (NORM/REVERSE)
 - RST RESET
- Press UP/DOWN button on the monitor or remote unit to increase or decrease the value of the adjustment functions for optimum viewing.
 - REMOTE CONTROL UNIT
 - POWER on/off
 Press this button to change mode of the screen picture.
 - 16 : 9 wide mode
 - 4 : 3 full mode

VIDEO SELECT

MIRROR

Press this button to reverse the picture horizontally. (LEFT TO RIGHT)

MENU

Up/down

FEATURES ON SCREEN DISPLAY CONTROL

ON SCREEN DISPLAY CONTROL

2 VIDEO INPUTS

16: 9 WIDE SCREEN TFT-LCD PANEL

SUPER BRIGHT TFT-LCD PANEL

4. WIRE CONNECTION

Red wire: +ve

Black wire: -ve

Violet wire: none

Yellow RCA Jack: Video 1

White RCA Jack: Video 2


5. ACCESSORIES

EXTENSION MINIDIN CABLE 1PC

REMOTE CONTROL UNIT 1 PC

VIDEO CABLE 1 PC

MOUNTING PLATE 1 PC

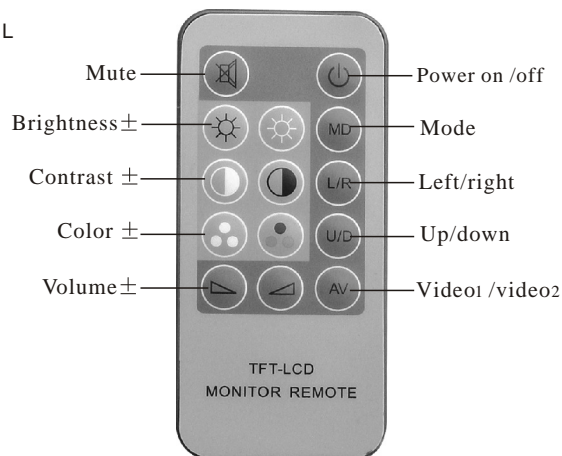

SPECIFICATIONS:

DISPLAY	7" WIDE SCREEN TFT-LCD
BACK LIGHT	BUILT IN CCFT
DOT FORMAT	1440 x 480
DOT PITCH	0.107(H) x 0.732(V)
VIEWING ANGLE	L/R/T/B 55/55/15/35
COLOR FIGURATION	STRIPE
BRIGHTNESS RATING	370 cd/m
CONTRAST RADIO	150:1
NUMBER OF PIXELS	" 691, 200"
VIDEO INPUT LEVEL	COMPOSITE 1.0V P-P/75 OHMS
VIDEO INPUT SYSTEMS	NTSC/PAL AUTO SWITCHING
POWER SOURCE	DC 12V +/- 15%
POWER CONSUMPTION	700Ma (max) / 10w (max)
OPERATION TEMPERATURE	-20 Celcius to + 75 Celcius
STORAGE TEMPERATURE	-30 Celcius to + 85 Celcius
DIMENSIONS	200 (W) x 166(H) x 38 (D) mm
NET WEIGHT	0.8 KGS